
RETSOL

RETSOL D-5030BT 2D BLUETOOTH SCANNER



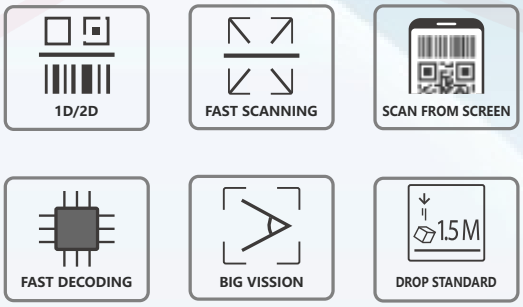

Key Features:

- Low power consumption, high performance
- Comprehensive reading of all mainstream 1-D, 2-D Barcode
- Quickly read the Barcode on the phone screen
- Supports RS232 interface and USB interface
- Aimer automatically lights up to facilitate quick alignment of the Barcode to be solved

WSC ISO9001 RoHS COMPLIANT CE FC

D-5030BT Technical Specifications

Performance Parameters	
Resolution	1280 pixels (H) X 1080 pixels (V)
Light Source	illumination: 4000K White LED, Aimer: Red Cross Laser
Field of View	38° (H) x 32° (V)
Scan Angle	Pitch ±65°, Yaw 360°, Roll ±60°
Print Contrast	≥25%
Motion Tolerance	>2m/s
Interfaces Supported	USB, RS-232
Bluetooth	Bluetooth 5.0, SPP
Operating Distance	100m (open conditions)
Endurance Time	11H
Charging Time	Support fast charging, the whole charging time is 2.5H, and the single battery charging time is 2H
Physical Parameters	
Dimensions	188mm x 90mm x 70mm
Weight	262g
Voltage/Current	4V DC / 600mA(operating): 120mA(standby)
Symbology Decode Capability	
1D	Code 128, Code 39, Code 93, EAN-8, EAN-13, UPC-E, UPC-A, GS1-128, Codabar, Interleaved 2 of 5, GS1 DataBar
2D	PDF417, QR Code, Micro QR, Data Matrix
User Environment	
Operating Temperature	0°C ~ 50°C
Storage Temperature	-40°C ~ 70°C
Humidity	5% to 95% relative Humidity, Non-Condensing
Drop Resistance	Withstand drop 1.8m on concrete
Ingress Protection	IP54
Ambient Light Immunity	86,000 Lux
Warranty	2 Years - Factory Warranty *

* Warranty - Against Manufacturing Defects on the Scanner
Specifications are subject to change without notice

Retail Solution & Technologies
A Complete Barcode and POS Solution

Head office :
#33, Thiruveedhi Amman Koil Street, Ramakrishna Nagar,
Raja Annamalaipuram, Chennai - 600 028, Tamilnadu, India

sales@retailsolution.in
044 2461 6222/6277, 2495 3936
www.retailsolution.in, www.retsol.co.in